

ALL BRIDGES


- MINIMUM LOAD WEIGHT OF 20 TONS
- SIGNS INDICATING WEIGHT LIMIT AND VERTICAL CLEARANCE LIMITS SHALL BE POSTED AT ENTRANCE(S)
- 20' RIGHT OF WAY FOR 2 WAY ROADS
- COMBINATION VEHICLE/PEDESTRIAN GUARD RAILS ON BOTH SIDES

BRIDGE WIDTH: 10'
MAX. LOAD: 80,000 LBS

ONE LANE BRIDGE

- 10 FT MINIMUM DRIVING LANE
- SIGNS INDICATING ONE WAY OR ONE LANE CONDITION
- UNOBSTRUCTED VISIBILITY ENTIRE LENGTH
- TURNOUTS AT BOTH ENDS

SIGN EXAMPLE
(NOT TO SCALE)

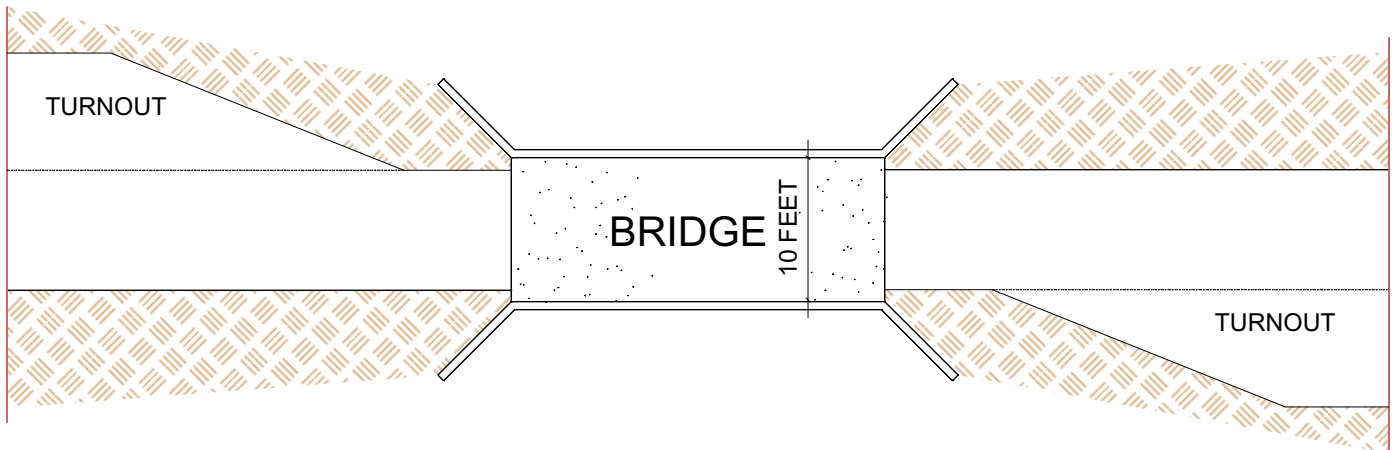

BRIDGE DESIGN SHALL BE ACCORDING TO: STANDARD SPECIFICATION FOR HIGHWAY BRIDGES, 6th EDITION, 1996 AS PROMULGATED BY THE AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO). APPLICANT SHALL PROVIDE A LETTER OF CERTIFICATION FROM A LICENSED ENGINEER VERIFYING MINIMUM LOAD DESIGN

PRIVATE BRIDGE REQUIREMENTS

**CAL FIRE/SLO COUNTY FIRE DEPARTMENT
PERMIT AND FIRE PREVENTION BUREAU**

635 N. Santa Rosa Avenue
San Luis Obispo, California 93405
Telephone (805) 543-4244 Fax (805) 543-4248

FIRE SAFE EXHIBIT

1/16" = 1'-0"

SCALE

3-3-08

REVISION DATE

4

EXHIBIT NO.